



Bekina Boots
footbeds



XAC8P/1053A EN ISO
20345:2011

stepliteX

THERMOPROTEC

FEATURES


- anti-static
- cut resistant
- ladder grip in sole for extra security
- wider fit
- safety: non-metallic toe cap (S4): no corrosion
- excellent grip, even on wet and greasy surfaces (SRC certified)
- thick outsole: high insulation for extra warm feet
- resistant to fats, manure and a variety of chemicals



INNOVATION
THROUGH
CRAFTSMANSHIP

Size chart

EU 37 - 48 | UK 4 - 13 | US 5 - 15

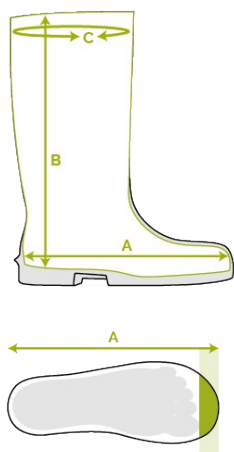


Please add an extra 1 cm / 0.4 inch for extra comfort or when wearing thick socks.

Size EU	Size UK	Size US	A. Length Of The Last		B. Shaft height		C. Shaft Circumference	
			mm	inch	mm	inch	mm	inch
37	4	5	247	9.72	305	12.01	410	16.14
38	5	5.5	253	9.96	310	12.20	420	16.54
39	6	6	260	10.24	315	12.40	430	16.93
40	6.5	7	267	10.51	320	12.60	430	16.93
41	7	8	273	10.75	325	12.80	440	17.32
42	8	9	280	11.02	330	12.99	450	17.72
43	9	10	287	11.30	335	13.19	460	18.11
44	10	11	294	11.57	340	13.39	470	18.50
45	10.5	12	300	11.81	345	13.58	480	18.90
46	11	13	307	12.09	350	13.78	480	18.90
47	12	14	314	12.36	355	13.98	490	19.29
48	13	15	320	12.60	360	14.17	490	19.29

NEOTANE® TECHNOLOGY

NEOTANE® Technology is the combination of a unique blend of materials and the innovative way of processing it. The high performing NEOTANE® material has been developed based on over 60 years of experience and the feedback from millions of end users. For decades we have been working together with the best equipment suppliers guaranteeing us high quality products made with **NEOTANE® Technology.**

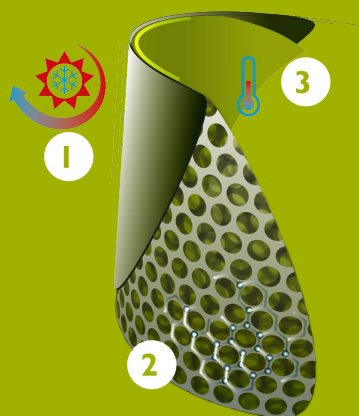

- 1 Sealed skin: strong and impermeable on the outside
- 2 Tiny air bubble structure: light and insulating
- 3 Self-regulating thermal process on the inside

MADE IN
BELGIUM

Since 1962



NEXT GEN TECHNOLOGY



LONG-LASTING COMFORT



INNOVATIVE SAFETY FEATURES



SUPERIOR SUSTAINABILITY



Bekina Boots NV • Berchemstraat 124 • 9690 Kluisbergen (BE) • +32 55 39 00 20 •
info@bekina-boots.com • www.bekina-boots.com • Date/revised 28/04/2024

